


SPECIFICATION SHEET

Wetterbest® W10


Corrugated roof tile

W10 corrugated sheet with trapezoidal profile is available in two dimensions in width, 1150 mm and 871 mm respectively. With a corrugation height of 10 mm, the W10 corrugated sheet can be used for cladding and coating work on a continuous support.

It is ideal for industrial projects, for the exterior and interior of buildings, for roofs, walls and various applications with an aesthetic role, as well as for covering civil constructions (houses, blocks of flats, offices) and cladding fences and soffit areas of the roofs.

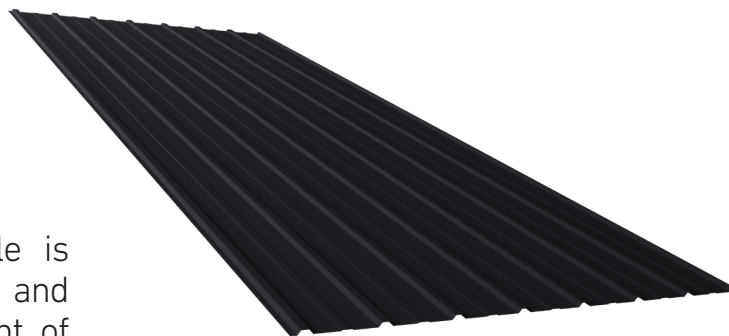

Technical details

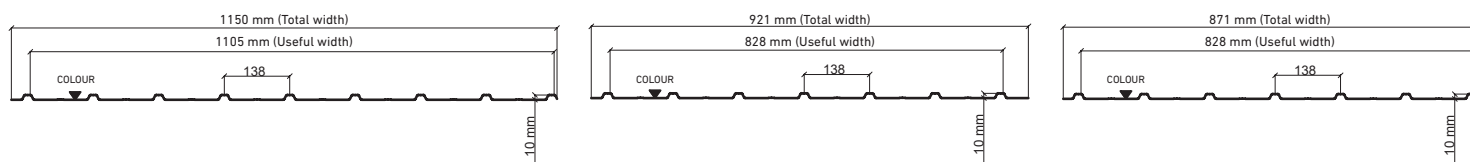

Total width	Useful width	Corrugation height	Maximum length
1150 mm	1105 mm	10 mm	4000 mm
921 mm	828 mm		
871 mm	828 mm		

Material specifications

PROJECTION TYPE	GLOSSY			MAT	NEOMAT 30	SUPREM 50
Material thickness (mm)	0.25-0.30-0.35 0.40 0.45-0.50-0.60			0.40 0.45-0.50	0.50	0.50
Warranty (corrosion/colour)	2/2	5/5	10/10	5/5 15/15	30/30	50/25

Note: The CE marking applies to thicknesses higher than 0.40 mm.

Materials

DIMENSIONAL TOLERANCES	REFERENCE	RAW MATERIAL	REFERENCE
Product	SR EN 508-1: 2014	Hot dip galvanised steel	SR EN 10346: 2015
Material	SR EN 10143: 2006	Organic coated steel	SR EN 10169: 2011 +A1: 2012