


DATA SHEET

Metallic roofing tile

Wetterbest® Clasic

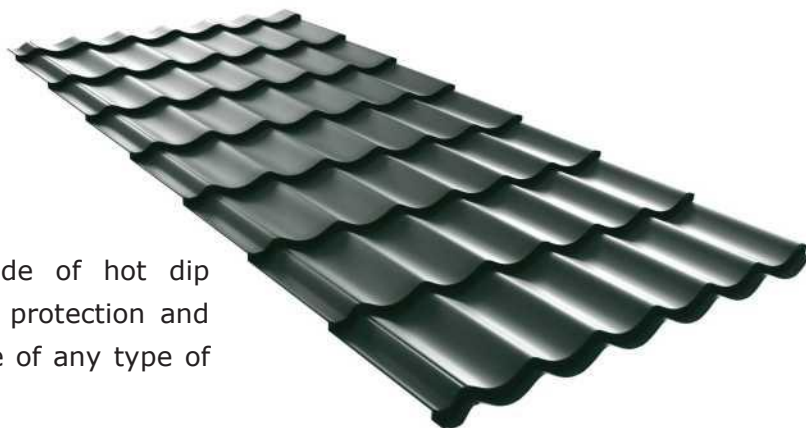


Wetterbest® Clasic metallic roofing tile is made of hot dip galvanised steel, protected with multilayer paint protection and dimensionally optimised for the efficient coverage of any type of building.

The Clasic metallic roofing tile has a low specific weight and increased strength, thus optimising the structure of the building and its durability.

With a discreet and elegant geometry profile, the Wetterbest® Clasic metallic roofing tile fits very well with the roofing of residential and commercial buildings, new and under rehabilitation.

Technical

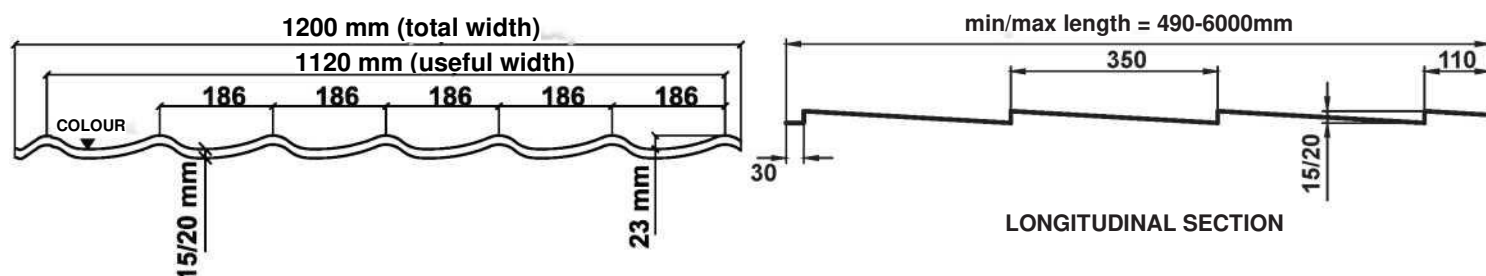

Total width	Useful width	Roofing tile wave height	Step height	Laths distance	Minimum length	Maximum length	Minimum slope	Unit of sale
1200 mm	1120 mm	23 mm	15/20 mm	350 mm	490 mm	6000 mm	14° (1:4)	m ²

Material specifications

PROJECTION TYPE	LUCIOS (GLOSSY)	MAT	NEOMAT 30	SUPREM 50
Specific weight (kg/m ²)	3.45/ 3.98/ 4.45	3.45/ 3.98/ 4.45	4.45	4.45
Material thickness (mm)	0.40/ 0.45/ 0.50	0.40/ 0.45/ 0.50	0.5	0.5
Warranty (corrosion/colour)	10 / 10 years	15 / 15 years	30/30 years	50/25 years

Materials

DIMENSIONAL TOLERANCES	REFERENCE	RAW MATERIAL	REFERENCE
Product	SR EN 508-1: 2014	Hot dip galvanised steel	SR EN 10346: 2015
Material	SR EN 10143: 2006	Organic coated steel	SR EN 10169: 2011 +A1 : 2012



SC Wetterbest SA

str. Înfrățirii, nr. 142, Băicoi, Prahova, Romania
Telephone: 0244.268.633 | Mobile: 0735.35.35.35

www.wetterbest.ro